

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 869 647 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
24.07.2002 Bulletin 2002/30

(51) Int Cl.7: **H04L 27/26, H04L 1/12**

(21) Application number: **98302202.1**

(22) Date of filing: **24.03.1998**

(54) **Method and system for multicarrier communication with dynamically scalable operating parameters**

Verfahren und System zur Mehrträgerübertragung mit dynamisch skalierbaren Betriebsparametern

Procédé et système de communication multiporteuse à paramètres de fonctionnement dynamiquement réglables

(84) Designated Contracting States:
DE FR GB

(30) Priority: **01.04.1997 US 834684**

(43) Date of publication of application:
07.10.1998 Bulletin 1998/41

(73) Proprietor: **LUCENT TECHNOLOGIES INC.**
Murray Hill, New Jersey 07974-0636 (US)

(72) Inventor: **van Nee, Richard D.J.**
3454 CG De Meern (NL)

(74) Representative:
Watts, Christopher Malcolm Kelway, Dr. et al
Lucent Technologies (UK) Ltd,
5 Mornington Road
Woodford Green Essex, IG8 0TU (GB)

(56) References cited:

WO-A-94/11961

US-A- 5 282 019

US-A- 5 416 767

- **PATENT ABSTRACTS OF JAPAN** vol. 1996, no. 04, 30 April 1996 (1996-04-30) & JP 07 321765 A (NIPPON HOSO KYOKAI), 8 December 1995 (1995-12-08)
- **PATENT ABSTRACTS OF JAPAN** vol. 010, no. 129 (E-403), 14 May 1986 (1986-05-14) & JP 60 259040 A (NIPPON DENKI KK), 21 December 1985 (1985-12-21)
- **KINUGAWA Y ET AL: "FREQUENCY AND TIME DIVISION MULTIPLE ACCESS WITH DEMAND-ASSIGNMENT USING MULTICARRIER MODULATION FOR INDOOR WIRELESS COMMUNICATIONS SYSTEMS" IEICE TRANSACTIONS ON COMMUNICATIONS,JP,INSTITUTE OF ELECTRONICS INFORMATION AND COMM. ENG. TOKYO, vol. E77-B, no. 3, 1 March 1994 (1994-03-01), pages 396-402, XP000451014 ISSN: 0916-8516**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**BACKGROUND OF THE INVENTION****1. Field of The Invention**

[0001] This invention relates to communication systems and, more particularly, OFDM (Orthogonal Frequency Division Multiplexing) modulation schemes which are suitable to provide a wide range of information transfer rates in a wide range of physical environments.

2. Description of Related Art

[0002] OFDM is a block-oriented modulation scheme that maps N data symbols into N orthogonal carriers separated by a distance of $1/T$, where T is the block period. As such, multi-carrier transmission systems use OFDM modulation to send data bits in parallel over multiple, adjacent carriers (also called tones or bins). An important advantage of multi-carrier transmission is that inter-symbol interference due to signal dispersion (or delay spread) in the transmission channel can be reduced or even eliminated by inserting a guard time interval between the transmission of subsequent symbols, thus avoiding an equalizer as required in single carrier systems. This gives OFDM an important advantage over single carrier modulation schemes. The guard time allows delayed copies of each symbol, arriving at the receiver after the intended signal, to die out before the succeeding symbol is received. OFDM's attractiveness stems from its ability to overcome the adverse effects of multi-channel transmission without the need for equalization. A need exists for a flexible OFDM system which provides the advantages of OFDM to a variety of communication environments.

[0003] JP-A-07321765 discloses an OFDM transmitter arrangement that changes the power level of each carrier in a block of OFDM carriers on a symbol-by-symbol basis to reduce crosstalk with other services. The system changes the power of the OFDM carriers based on a mapping pattern.

[0004] US-A-5416767 describes a method for transmitting a data stream of groups of N symbols (N being an integer) using N frequency division multiplexed carriers. Each carrier is modulated with a distinct symbol from the group for a period that exceeds the periods between subsequent symbol groups, such that the modulation signals of the carriers have a symbol rate at least N times lower than the symbol rate in the data stream and so that inter-symbol interference in the modulated signals is deliberately introduced. The resulting transmission is less vulnerable to noise in the transmission channel.

[0005] US-A-5680388 discloses a method and apparatus for dynamically allocating multiple carrier wave channels in a frequency division multiplexing communication system. A wider frequency band may be divided into a plurality of subbands to enable users to transmit at higher speeds.

[0006] US-A-5282019 discloses a method for encoding a television source signal having a first bandwidth into a frequency multiplexed signal that comprises a plurality of modulated subcarriers. Each subcarrier has an amplitude, bandwidth, and coding characteristic that reflects the relative importance of the digital information provided thereby.

Summary of the Invention

[0007] Methods and a system according to the invention are as set out in the independent claims.

[0008] The scaleable OFDM system according to the principles of the present invention provides increased flexibility and adaptability by providing scaling of the operating parameters and/or characteristics for the OFDM system. For example, control circuitry can scale the transmission rate by scaling of the OFDM symbol duration, the number of carriers and/or the number of bits per symbol per carrier. Scaleability permits the scaleable OFDM system to operate in various communications environments requiring various operating parameters and/or characteristics. By scaling the operating parameters and/or characteristics of the OFDM system when control circuitry determines that different operating parameters and/or characteristics are necessary or advantageous, the control circuitry can dynamically change the operating parameters and/or characteristics, thereby providing compatibility or the desired performance. For example, by dynamically scaling the bit rate, widely varying signal bandwidths, delay spread tolerances and signal-to-noise ratio (SNR) requirements can be achieved. As such, a scaleable OFDM system is particularly suitable for application in mobile, wireless communication devices, which support a variety of services, in a variety of environments, indoor as well as outdoor and in radio channels with differing bandwidths.

[0009] In accordance with aspects of certain embodiments of the scaleable OFDM modulation system, a coded OFDM modulation system can be designed with an upper limit on the number of carriers and a variable symbol duration. The control circuitry can dynamically scale the number of carriers below the upper limit on the number of carriers to decrease the signal bandwidth and the transmission rate while delay spread tolerance remains the same. The control circuitry can also dynamically increase the symbol duration to decrease the transmission rate and the signal bandwidth

and provide an increase in delay spread tolerance. In accordance with other embodiments, the scaleable OFDM modulation system achieves variable transmission rates using adaptive coding where different coding schemes are used to improve the link reliability and/or to decrease the peak-to-average power ratio.

[0010] In accordance with yet other embodiments of the scaleable OFDM modulation system, scaleable transmission rates permit asymmetric data rates between mobile units and base stations. For example, the mobile units can have lower data rates than the base stations by allocating only a fraction of the total number of carriers to each mobile, while the base stations transmit at all carriers simultaneously. Additionally, during data downloading for example, a mobile unit could have a larger downlink data rate than uplink data rate. In accordance with other aspects of a scaleable OFDM system, mobile units and base stations using the same antennas for both transmit and receive can benefit from adaptive antennas with any additional processing done at the base station, thereby keeping the mobile as simple as possible. The scaleable OFDM modulation system can use an adaptive antenna at the base by sending feedback through the uplink, for example, when channel characteristics of uplink and downlink are not identical.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] Other aspects and advantages of the present invention may become apparent upon reading the following detailed description and upon reference to the drawings in which:

FIG. 1 shows a block diagram of an embodiment of an OFDM transmitter according to certain principles of the present invention;

FIG. 2 shows a diagram for explaining the windowing of OFDM symbols;

FIG. 3 shows a plot of an OFDM power spectrum for explaining the effects of changes to certain parameters of an OFDM transmitter;

FIG. 4 shows a block diagram of an embodiment of an OFDM receiver according to certain principles of the present invention; and

FIG. 5 shows an OFDM system using OFDM transmitters and receivers according to the principles of the present invention.

DETAILED DESCRIPTION OF THE DRAWINGS

[0012] Illustrative embodiments of the improved OFDM system with scaleable operating parameters and/or characteristics according to the principles of the present invention are described below as the improved OFDM system might be implemented to provide a flexible communications system for use in a variety of communication environments. Scaleability permits the scaleable OFDM system to operate in various communications environments requiring various operating parameters and/or characteristics. By scaling the operating parameters and/or characteristics of the OFDM system when control circuitry determines that different operating parameters and/or characteristics are necessary or advantageous, the control circuitry can dynamically change the operating parameters and/or characteristics, thereby providing compatibility or the desired performance. For example, by dynamically scaling the bit rate, widely varying signal bandwidths, delay spread tolerances and signal-to-noise ratio (SNR) requirements can be achieved.

[0013] The scaleable OFDM systems can be characterized by various operating parameters, including the following:

- number of carriers (N);
- symbol duration (T_s);
- number of bits per symbol per carrier (m);
- forward error correction coding scheme;
- coding rate; and
- the fraction of the symbol duration that is used as guard time.

[0014] By varying these parameters, various operating characteristics can be scaled, including the following:

- transmission rate (bit rate or data rate);
- signal-to-noise ratio (the larger the SNR, the lower the bit error rate);
- delay-spread tolerance;
- signal bandwidth; and
- implementation complexity

[0015] The scaleable OFDM system can scale operating parameters and/or characteristics in various ways. For example, to dynamically scale the transmission rate, the scaleable OFDM system can dynamically adjust the symbol

duration, coding rate, the number of bits per symbol per carrier and/or the number of carriers depending upon the required or desired operating parameters and/or characteristics. In this particular example, depending upon how the control circuitry scales transmission rate, the scaleable OFDM system scales delay spread tolerance, signal to noise ratio, and signal bandwidth in different ways, making the scaleable OFDM system an attractive scheme for the implementation of flexible, (dynamically) scaleable communication systems.

[0016] For example, to double the transmission rate of the scaleable OFDM system the following operating parameters and/or characteristics of the system can be dynamically scaled or adjusted:

1. The coding rate. In general, a channel code is applied to reduce the rate of bit errors caused by OFDM-specific channel impairments, such as multipath among the carriers. The rate of such a code can be varied to trade off bit rate against bit error rate.
2. The carrier modulation scheme. By doubling the number of bits per symbol per carrier, the bandwidth and delay spread tolerance does not change, but the SNR is reduced, thereby resulting in a higher bit error rate.
3. The symbol duration. By halving the symbol duration, the delay spread tolerance is halved, signal bandwidth is doubled, but implementation complexity is only increased by a factor of 2 (due to the speed-up by a factor of two).
4. The number of carriers. By doubling the number of carriers, delay spread tolerance remains the same, the signal bandwidth doubles and the implementation complexity is quadrupled (both number of operations and speed are doubled) for an IDFT implementation or by $2(n+1)/n$ if an IFFT implementation is used.

[0017] An additional scaling parameter which can be changed is the ratio of guard time and symbol time. Changing this ratio affects SNR (a larger relative guard time claims energy that would otherwise go into the signal) and transmission rate (a larger relative guard time reduces the bit rate) and the delay-spread tolerance (a larger relative guard time improves the resistance against delay-spread).

[0018] FIG. 1 shows an OFDM transmitter 10 having signal circuitry 1 which receives a data stream of data bits from a data source 12. The coding block 14 receives the data stream and partitions the data stream into successive groups or blocks of bits. The coding block 14 introduces redundancy for forward error correction coding. In certain embodiments according to other aspects of the present invention, variable data rates with OFDM are achieved by using different forward error correction coding schemes and/or variable modulation schemes for each carrier as controlled by dynamic control circuitry 15. For example, if a mobile unit is at the edge of a coverage zone, the dynamic control circuitry can decrease the coding rate to lower the data rate with the advantage of increased delay spread tolerance and better SNR performance. Such a decrease in coding rate is followed by a decrease in spectral efficiency (amount of bits per second which can be transmitted in a certain bandwidth) proportional to the decrease in coding rate.

[0019] In accordance with the principles of the present invention, the dynamic control circuitry 15 can be responsive to any of a number of possible inputs to set the coding block 14 to the appropriate coding rate. For example, in a transceiver embodiment, the dynamic rate control circuitry 15 can detect transmission errors, such as through feedback from an OFDM receiver (FIG. 4) and dynamically reduce the coding rate. Alternatively, each data packet could have a fixed code indicating the appropriate coding rate, or in a transceiver application, the coding scheme could mirror the coding rate of the received input from another transmitter (not shown). Finally, the dynamic rate control circuitry 15 could be responsive to external settings to set the coding rate.

[0020] In similar fashion, the control circuitry 15 can respond to a variety of inputs by scaling the number of bits per symbol per carrier (for example, by changing the constellation size in embodiments using phase-shift keying (PSK) modulation). By increasing the number of bits per symbol per carrier, the bandwidth and delay spread tolerance do not change, but the SNR is reduced resulting in a higher bit error rate. To scale the number of bits per symbol per carrier, for example, the dynamic rate control circuitry 15 can change from QPSK (quaternary or 4-PSK) modulation to other phase modulations, such as 8-PSK, or to other modulation schemes, such as QAM (quadrature amplitude modulation, e.g., 16-QAM).

[0021] The blocks of coded data bits are input into an N-points complex IFFT (Inverse Fast Fourier Transform) 16, where N is the number of the OFDM carriers. In this particular embodiment, the IFFT 16 is performed on blocks of 2N coded data bits received from the coding block 14. In practice, the transmitter 10 has to use oversampling to produce an output spectrum without aliasing which introduces unwanted frequency distortion due to (intended or unintentional) low pass filtering in subsequent stages of the transmitter or in the transmission channel. Thus, instead of an N-points IFFT 16, an M-points IFFT 16 is actually done where $M > N$ to perform the oversampling. These 2N bits are converted into N complex numbers, and the remaining M-N input values are set to zero.

[0022] A clock 17 provides a time base for the IFFT 16, and the output of the IFFT 16 is parallel-to-serial converted to produce an OFDM symbol. In particular embodiments according to the principles of the present invention, the control circuitry 15 scales operating parameters and characteristics, such as transmission rate, by changing the symbol duration T_s while keeping the number of carriers N constant. In this particular embodiment, the control circuitry 15 accomplishes this by controlling the clock 17 to adjust the time base to the IFFT 16. By decreasing the symbol duration,

an inversely proportional increase in the transmission rate is achieved. At the same time, the delay spread tolerance is decreased. However, this is usually not a problem, because the higher data rate also means a decrease in range, and lower range means lower delay spread values.

[0023] As an example, consider an OFDM system which has to support applications ranging from mobile telephony, with raw data rates in the order of 270 kbps, to indoor wireless LANs, with data rates up to 20 Mbps. Maximum delay spread requirements are 16 μ s for mobile telephony down to about 200 ns for wireless LANs. Further, we require the OFDM signal to occupy a bandwidth of 200 kHz for the mobile telephony case, in order to be compatible with GSM channel spacing. All these requirements can be met by using OFDM with 32 carriers and a variable symbol duration T_s of 200 μ s down to 2 μ s. For a symbol duration of 200 μ s, a guard time of 20 μ s is included to deal with the delay spread. This gives a carrier spacing of $1/(180 \mu\text{s}) \approx 55.6$ kHz. This means there are exactly 36 carriers possible in a bandwidth of 200 kHz. By using 4 carriers as guard band, in order to fulfill spectrum requirements, 32 carriers remain for data transmission. Using QPSK with 2 bits per carrier per symbol, this gives a raw data rate of $32 \cdot 2 / (200 \mu\text{s}) = 320$ kbps.

[0024] By decreasing the OFDM symbol duration in the above described example, the data rate can be increased at the cost of a decreased delay spread tolerance. The maximum allowable delay spread is proportional to the OFDM guard time. Hence, for wireless LANs with a maximum tolerable delay spread of 200 ns, the symbol duration can be decreased to 2.5 μ s, including a guard time of 250 ns. These parameters give an occupied bandwidth of 16 MHz and a raw data of 25.6 Mbps.

[0025] Table I lists several parameter options for various scaleable transmission or data rates. The first three options are for 32 carriers, the next three for 64 carriers, showing larger delay spread tolerance and a slightly smaller occupied bandwidth.

Table 1:

<i>Examples of parameter options for scaleable data rates, assuming QPSK modulation of all carriers.</i>				
Symbol duration [μ s]	Guard time [μ s]	Number of carriers	Bandwidth [MHz]	Raw data rate [Mbps]
200	20	32	0.2	0.32
10	1	32	4	6.4
2.5	0.25	32	16	25.6
400	40	64	0.19	0.32
20	2	64	3.78	6.4
5	0.5	64	15.11	25.6

[0026] The advantage of this OFDM modulation system over the existing GMSK modulation of GSM is higher spectrum efficiency and better spectrum properties in terms of adjacent channel interference. OFDM can have relatively large peak-to-average power ratio, but dynamically scaling the number of carriers can reduce the peak-to-average power ratio.

[0027] In this particular embodiment, the control circuitry 15 can provide variable transmission rates as well as other operating features by scaling the number of carriers. By transmitting a subset of the maximum number of carriers designed for the particular OFDM system, the decrease in data rate is proportional to the decrease in the number of transmitted carriers. Decreasing the number of transmitted carriers can also combine modulation technique and Medium Access Control (MAC), since multiple users can transmit simultaneously in the same band, using different sets of carriers. An additional advantage of such an approach is that the peak-to-average power ratio per user is reduced. This means a better power efficiency can be achieved, which is very important for battery-driven devices. Alternatively, the dynamic control circuit 15 can scale the number of carriers by directing the modulation of only part of the phases onto adjacent carriers. Such a result is advantageous if the encoder has to operate in a channel with a smaller available bandwidth.

[0028] In accordance with certain embodiments of the present invention, the dynamic control circuitry 15 can dynamically change N to vary the number of carriers. For example, the N-points IFFT 16 can be dynamically reduced to a X-points IFFT 16 where $X < N$. In this particular example, the IFFT 16 is designed to handle the N carriers as the maximum number of carriers and dynamically scaled to less than N carriers by performing an X-point IFFT 16 according to the control signals from the dynamic rate control circuitry 15. Alternatively, the dynamic control circuitry 15 can dynamically direct the OFDM transmitter 10 to transmit fewer than N carriers by calculating the IFFT for less than 2N input bits, leaving the other values zero and thereby permitting multiple access.

[0029] To decrease the sensitivity to inter-symbol interference, the cyclic prefixer and windowing block 18 copies the

last part of the OFDM symbol and augments the OFDM symbol with the copied portion of the OFDM symbol. This is called cyclic prefixing. The control circuitry 15 can control the cyclic prefixer and windowing block 18 to adjust the guard time and/or the fraction of the guard time to symbol duration, for example, to the values listed for the above OFDM system example. To reduce spectral sidelobes, the cyclic prefixing and windowing block 18 performs windowing on the OFDM symbol by applying a gradual roll-off pattern to the amplitude of the OFDM symbol. The OFDM symbol is input into a digital-to-analog converter after which it is sent to the transmitter front-end 22 that converts the baseband wave form to the appropriate RF carrier frequency in this particular embodiment for transmission over antenna 24.

[0030] FIG. 2 shows a basic representation of the windowing of an OFDM symbol where T_s is the total symbol duration, T is the FFT time, i.e., there are N samples in T seconds. The carrier spacing is $1/T$ in Hz, and T_G is the guard time which helps reduce the intersymbol interference caused by multipath. The roll-off time is represented by βT_s where β is the roll-off factor. FIG. 3 shows an OFDM power spectrum in dB. The x-axis is normalized to carrier spacing, and the three (3) dB bandwidth has 16 carriers 60a-60p. Changing the FFT time T will change the spacing between the carriers 60a-p. Increasing the number of carriers N for a constant sampling rate $1/T$ will increase the number of carriers 60a-p while keeping the carrier spacing fixed, thereby increasing the width of the transmitted OFDM power spectrum. Decreasing the number of carriers N will similarly lead to decreasing the width of the transmitted OFDM power spectrum. Decreasing the sampling rate $1/T$ will increase T and decrease the carrier spacing, thereby decreasing the width of the transmitted OFDM symbol.

[0031] With particular reference to FIG. 4, the transmitted OFDM signal is received by an OFDM receiver 30 having signal circuitry 31 through a selected antenna 32. The OFDM signal is processed (down converted) using the receive circuitry 34 and automatic gain control (AGC) block 36. The processed OFDM signal is input into an analog-to-digital converter 38. The digital OFDM signal is received by a level detector 40 to provide a gain estimate feedback signal to the AGC 36. The digital OFDM signal is also received by a frequency compensation block 42 and a timing and frequency synchronization block 44. The timing and frequency synchronization block 44 acquires the OFDM symbol timing and provides a frequency estimate signal to the frequency compensation block 42 to correct for initial frequency offset and a timing signal to a Fast Fourier Transform (FFT) block 46.

[0032] In accordance with aspects of the present invention, dynamic control circuitry 47 provides scaleable operating parameters and/or characteristics at the receiver 30. The dynamic control circuitry 47 can receive inputs from the transmitter 10 (FIG. 1), from external settings and/or from the data destination block 51. In response, the dynamic rate control circuitry 47 controls the operation of the FFT 46 which is driven by a time base provided by clock 49. The dynamic control circuitry 47 can dynamically change the symbol duration by altering the time base from the clock 49 to the FFT 46. Additionally, the dynamic control circuitry 47 can respond to its inputs by controlling the operation of the FFT 46. The FFT 46 is designed to perform an N -point fast fourier transform on the OFDM symbol, but depending on the control signals from the dynamic control circuitry 47, can perform an X -point FFT where $X < N$ to dynamically change the number of carriers.

[0033] In the case of the maximum number of carriers, the resulting N complex carriers are input into a phase estimation block 48 and a phase compensation block 50. The phase estimation block 48 tracks the phases of the N carriers and provides phase estimates to the phase compensation block 50 which compensates the N carriers accordingly. The compensated carriers are input into decoding block 52 which decodes the forward error correcting code of the transmitter 10 (FIG. 1) and provides the data signals to the data destination block 51. Depending on its inputs, the dynamic control circuitry 47 can control the decoding block 52 to dynamically change the decoding rate and/or the demodulation scheme, thereby dynamically changing the operating parameters and/or characteristics, such as the data rate.

[0034] FIG. 5 shows an improved OFDM system 70 consisting of a base station 72 and a number of remote stations 74 which use dynamically scaleable OFDM transmitters 10 (FIG. 1) and receivers 30 (FIG. 4) according to the principles of the present invention to provide a dynamically scaleable OFDM system 70. The dynamic control circuitry 15 (FIG. 1) and 47 (FIG. 4) provides scaleability of operating parameters and/or characteristics between the base station 72 and the remote units 74. In the case of dynamically scaling the data rate, the improved OFDM system starts with low data rate between the base station 72 and a remote unit 74. Then, the dynamic control circuitry 15 (FIG. 1) of the transmitting station increases the data rate as the system design and signal quality permits. If the signal quality degrades, the dynamic control circuitry 15 (FIG. 1) decreases the data rate. The signal quality can be measured by one of the following: received signal strength, received signal to noise plus interference ratio, detected errors (CRC), the presence of acknowledgments (lack of acknowledgments the link for communication signals is bad). Additionally, other operating characteristics and/or parameters can be similarly monitored and scaled.

[0035] The OFDM receiver 30 (FIG. 4) of the receiving station 72 or 74 can perform these measurements on received signals, after which the dynamic control circuitry 47 determines what data rate or other operating characteristics and/or parameters to use and what data rate or other operating characteristics and/or parameters to use in the reverse direction. Accordingly, the receiver 30 provides feedback to the dynamic control circuitry 15 of the transmitter 10 of the receiving station 72 or 74 to dynamically scale the operating characteristics and/or parameters, such as the data rate,

between the two stations. Alternatively, the receiver 30 (FIG. 4) of the receiving station 72 or 74 can perform the signal quality measurements and send back the quality information or a request for particular operating characteristics and/or parameters, such as data rate, through its transmitter 10 to the receiver 30 of the transmitting station 72 or 74. The receiver 30 of the transmitting station 72 or 74 then can provide feedback to the dynamic control circuitry 15 at the transmitting station 72 or 74 to dynamically scale the operating characteristics and/or parameters, such as the data rate, between the stations 72 or 74. Although this particular embodiment of the OFDM system 70 has a base station 72 and remote stations 74, the scaling features according to aspects of the present invention extend to a network of non-centralized OFDM transceivers.

[0036] Furthermore, in certain embodiments, the OFDM system 70 according to the principles of the present invention, can be used to implement multiple access of multi-rate systems by dynamically scaling the number of carriers. One remote station 74 could be sending on just one carrier, another remote station 74 on 4 other carriers, while a third remote station 74 could be sending on yet another 2 carriers, all at the same time. For proper decoding it is mandatory that the signals of all carriers (from different remote stations 74) are received with roughly the same relative delays by the base station 72.

[0037] In the case of certain embodiments of centralized systems which dynamically scale the number of carriers, the base station 72 receives from and transmits to all remote stations (mobile units 74 in this embodiment) within its range. Thus, the base station 72 of this particular embodiment should be capable of receiving and transmitting at all carriers simultaneously. This implies that the base station 72 faces a larger peak-to-average power ratio than the mobiles 74, but that is not really a drawback, since the base 72 is not battery-driven.

[0038] Transmitting on subsets of carriers provides the possibility of *asymmetric* data links, meaning that data rates can be different for uplink and downlink. Asymmetric links often occur in practice, e.g., downloading data. The OFDM system 70 can support such asymmetric links by dynamically providing remote stations 74 with a different number of carriers for uplink and downlink. Also, since in a centralized system the base station 72 can transmit at higher power levels than the mobiles 74, it is possible to use higher level modulation schemes on the carriers (e.g. 16 QAM), such that the downlink capacity is larger than the uplink capacity.

[0039] Advantages of using dynamic control circuitry 15 (FIG. 1) and 47 (FIG. 4) to achieve asymmetric rates are:

- Downlink capacity can be made larger than uplink capacity.
- Uplink capacity can be shared by dividing total number of carriers into subsets.
- Mobiles 74 can transmit longer packets at a lower rate compared to pure TDMA. This has the advantage that the average transmitted power is lower (simpler power amplifier) and also that the relative overhead caused by training is reduced.
- Mobiles 74 only have to transmit a limited number of carriers, which reduces the peak-to-average power of the transmitted signal. This means the mobiles 74 can achieve a better power efficiency, which is very important for battery-driven devices.

[0040] When different mobiles 74 are allowed to transmit simultaneously at different carriers, the following can arise:

- Symbol synchronization is necessary between mobiles and base station. Such synchronization is already present in TDMA systems like GSM. For the described OFDM example with a symbol duration of 200 μ s, the synchronization offset should be limited to about 5 μ s.
- Some power control is necessary to reduce near-far effects. The near-far effect is less serious than in CDMA systems, because the OFDM carriers are orthogonal, while CDMA codes usually have some non-zero cross-correlation. In OFDM, power control is only needed to reduce the dynamic range of A/D converters in the receiver, and to reduce multi-user interference caused by frequency offsets, which may introduce some correlation between carriers of different users.

[0041] In the previously described OFDM mobile phone option, with 32 carriers delivering 320 kbps in a bandwidth of 200 kHz, the band can be divided into 8 channels of 4 carriers each. Each channel then carries data at a raw rate of 40 kbps, which provides about 70% of redundancy for signaling overhead and forward error correction coding of a 13 kbps speech signal.

[0042] Thus, the OFDM system 70 can provide the advantages of asymmetric data rates when needed, such as during the downloading of data from the base station 72 to the remote station 74, by dynamically altering the number of carriers used for downlink to receiver 30 (FIG. 4) of the remote station 74 and for uplink from the transmitter 10 of the remote station 74. Additionally, the OFDM system 70 can dynamically scale various operating characteristics and/or parameters for the stations 72 and 74 and can provide different operating characteristics and/or parameters between the base station 72 and different remote stations 74 or provide varying symmetric operating characteristics and/or parameters between the base station 72 and a remote unit 74. Alternatively, the dynamic scaling of operating param-

eters and/or characteristics between stations to provide different operating parameters and/or characteristics between the stations can be performed in a non-centralized OFDM system of transceivers.

[0043] In certain embodiment of the OFDM system 70 of FIG. 5, adaptive antennas 78 can be used at the base station 72 to make the antenna pattern adaptive and different for each carrier such that the signal-to-noise plus interference ratio is maximized for each carrier. In OFDM, the base 72 simply measures the amplitude of several carriers to obtain the spectrum of incoming signal which provides simultaneous adaptive antennas. Adaptive antenna control circuitry 80 can control the adaptive antennas 78 in the following manner to provide improved performance in the OFDM system 70:

- Base 72 measures uplink channel (N carrier amplitudes, SNR/SIR), assuming downlink channel equal to uplink channel,
- If downlink and uplink channels are not equal because they are at different frequencies for instance (as in UMTS), the mobile 74 can send measured downlink carrier amplitudes as feedback over the uplink to the base station 72;
- In uplink, base station 72 uses adaptive antenna to maximize signal-to-noise and interference ratio; and
- In downlink, base station 72 uses measured uplink channel or feedback from mobile to select amplitudes and phases for each carrier and each antenna of the adaptive antennas 78. In this way, the OFDM system 70 benefits from improved antenna gain for each carrier. By transmitting more power in relatively good carriers, power is not wasted in carriers which do not reach the mobile 74 anyway.

[0044] As such, the adaptive antenna control in the OFDM system 70 provides improved efficient performance. Together with the dynamic control aspects of the OFDM system 70, a flexible OFDM system 70 is provided which can improve the operation between the stations by using the adaptive antenna system in conjunction with the dynamic control to improve the OFDM system performance. For example, a certain subset of carriers can be dynamically chosen taking into account feedback from the adaptive antenna control circuitry. Alternatively, in an embodiment of a network of non-centralized OFDM transceivers, the transceivers or a subset of the transceivers could take advantage of adaptive antennas.

[0045] Thus, the improved OFDM (Orthogonal Frequency Division Multiplexing) modulation system provides increased flexibility and adaptability by using scaleable operating characteristics and/or parameters which allow the improved OFDM system to operate in various communications environments. The improved OFDM system accomplishes this by dynamically changing operating parameters, such as the number of carriers, the symbol duration, the coding rate, the modulation scheme and/or the number of bits per symbol per carrier, to scale the operating parameters and/or characteristics of the OFDM system. The dynamic rate control circuitry can dynamically scale the operating parameters and/or characteristics of the OFDM system or various subsets of the operating parameters and/or characteristics while maintaining other operating characteristics and/or parameters fixed to achieve the desired operation or performance for the OFDM system.

[0046] In addition to the embodiments described above, alternative configurations of the improved OFDM modulation system are possible which omit or add components or use different components in performing the dynamic scaling of the OFDM system parameters and/or characteristics or a variation thereof. For example, only portions of the described control circuitry can be used to provide a subset of the scaling features, or separate control circuitry can be used which are associated with the various transmitter components. Additionally, the above-described OFDM system has been described as being comprised of several components, but it should be understood that the OFDM system and portions thereof can be employed using application specific integrated circuits, software driven processing circuitry, or other arrangements of discrete components.

[0047] What has been described is merely illustrative of the application of the principles of the present invention. Those skilled in the art will readily recognize that these and various other modifications, arrangements and methods can be made to the present invention without strictly following the exemplary applications illustrated and described herein and without departing from the scope of the present invention.

Claims

1. A method for providing communication signals according to operating parameters using orthogonal frequency division multiplexing, said operating parameters including symbol duration, guard time interval, number of multiplexed carriers, and number of bits per symbol per carrier, said method **CHARACTERIZED BY** the steps of:

receiving a feedback signal from a receiver (31);

determining that an operating characteristic should be scaled from a first level to a second level based on said

feedback signal received from said receiver (31), said operating characteristic being at least one of transmission rate, signal-to-noise ratio, and delay-spread tolerance; and

dynamically scaling at least one of said operating parameters to achieve an operating characteristic of said second level by adaptively selecting one of a plurality of operating parameter scaling options in accordance with said determining step.

2. The method of claim 1 further **CHARACTERIZED BY** the steps of:

providing said communication signals at a data rate; and
dynamically changing said data rate.

3. The method of claim 1 further including the step of providing OFDM symbols from said communication signals, and **CHARACTERIZED IN THAT** said step of dynamically scaling includes the step of:

dynamically changing symbol duration for said OFDM symbols.

4. The method of claim 3 **CHARACTERIZED IN THAT** said step of dynamically changing further includes the steps of

transforming said communication signals into an OFDM symbol using a fourier transformation; and
altering a time base for said fourier transformation.

5. The method of claim 1 further including the step of providing OFDM symbols from said communication signals, and **CHARACTERIZED IN THAT** said step of dynamically scaling includes the step of

dynamically changing the number of carriers for said OFDM symbols.

6. The method of claim 1 **CHARACTERIZED IN THAT** said step of dynamically scaling includes the steps of

coding communication signals according to a coding rate; and
dynamically changing said coding rate.

7. The method of claim 1 **CHARACTERIZED IN THAT** said step of dynamically scaling includes the steps of:

modulating carriers according to a first modulation scheme; and
dynamically changing said first modulation scheme to a second modulation scheme.

8. The method of claim 1 further **CHARACTERIZED BY** the steps of:

transmitting OFDM symbols at an uplink data rate; and
receiving communication signals at a downlink data rate.

9. The method of claim 8 further **CHARACTERIZED BY** the steps of:

dynamically changing said downlink data rate.

10. The method of claim 9 **CHARACTERIZED IN THAT** said step of dynamically changing said downlink data rate includes the step of:

dynamically changing the number of carriers for said communication signals.

11. A method of receiving orthogonal frequency division multiplexed symbols according to operating parameters, said operating parameters including symbol duration, guard time interval, number of multiplexed carriers, and number of bits per symbol per carrier, said method **CHARACTERIZED BY** the steps of:

receiving an orthogonal frequency division multiplexed signal that includes orthogonal frequency division multiplexed symbols;

generating a feedback signal based on said orthogonal frequency division multiplexed signal and providing said feedback signal to dynamic control circuitry that determines whether an operating characteristic of orthogonal frequency division multiplexed symbols should be changed based on said feedback signal, said operating characteristic being at least one of transmission rate, signal-to-noise ratio, and delay-spread tolerance; and

dynamically changing at least one of said operating parameters for said method of receiving, thereby enabling said method to receive orthogonal frequency division multiplexed symbols provided in accordance with dynamically scaled operating characteristics.

12. An orthogonal frequency division multiplexing system for providing communication signals according to operating parameters, said operating parameters including symbol duration, guard time interval, number of orthogonal frequency division multiplexed carriers, and number of bits per symbol per orthogonal frequency division multiplexed carrier, said system **CHARACTERIZED BY**,

dynamic control circuitry (15) which receives a feedback signal from a receiver (31), determines whether an operating characteristic should be scaled from a first level to a second level based on said feedback signal, said operating characteristic being at least one of transmission rate, signal-to-noise ratio, and delay-spread tolerance, and, after determining that said operating characteristic for providing communication signals should be scaled from said first level to said second level based on said feedback signal, provides control signals to signal circuitry (13, 16, 17) to dynamically scale at least one of said operating parameters to achieve said operating characteristic of said second level, said control circuitry (15) controlling a scalable operating characteristic by adaptively selecting one of a plurality of operating parameter scaling options.

Patentansprüche

1. Verfahren zur Bereitstellung von Kommunikationssignalen entsprechend Betriebsparametern mit orthogonalem Frequenzmultiplex, wobei die Betriebsparameter Symboldauer, Schutzintervall, Anzahl gemultiplexter Träger und Anzahl von Bit pro Symbol pro Träger enthalten, **gekennzeichnet durch** folgende Schritte:

Empfangen eines Rückkopplungssignals von einem Empfänger (31);

Bestimmen, daß eine Betriebseigenschaft auf Grundlage des vom Empfänger (31) empfangenen Rückkopplungssignals von einer ersten Stufe auf eine zweite Stufe skaliert werden sollte, wobei die Betriebseigenschaft zumindest eine aus Übertragungsgeschwindigkeit, Signal/Rauschabstand und Laufzeitverbreiterungstoleranz ist; und

dynamisches Skalieren von zumindest einem der Betriebsparameter zum Erzielen einer Betriebseigenschaft der zweiten Stufe **durch** adaptive Auswahl einer aus einer Mehrzahl von Betriebsparameter-Skaliermöglichkeiten entsprechend dem Schritt des Bestimmens.

2. Verfahren nach Anspruch 1, weiterhin **gekennzeichnet durch** folgende Schritte:

Bereitstellen der Kommunikationssignale mit einer Datenrate und

dynamisches Ändern der Datenrate.

3. Verfahren nach Anspruch 1, weiterhin mit dem Schritt des Bereitstellens von OFDM-Symbolen aus den Kommunikationssignalen und **dadurch gekennzeichnet, daß** der Schritt des dynamischen Skalierens den Schritt des dynamischen Änderns der Symboldauer für die OFDM-Symbole einschließt.

4. Verfahren nach Anspruch 3, **dadurch gekennzeichnet, daß** der Schritt des dynamischen Änderns weiterhin folgende Schritte einschließt:

Umsetzen der Kommunikationssignale in ein OFDM-Symbol unter Verwendung einer Fourier-Transformation und

Ändern einer Zeitbasis für die Fourier-Transformation.

5. Verfahren nach Anspruch 1, weiterhin mit dem Schritt des Bereitstellens von OFDM-Symbolen aus den Kommunikationssignalen und **dadurch gekennzeichnet, daß** der Schritt des dynamischen Skalierens den Schritt des dynamischen Änderns der Anzahl von Trägern für die OFDM-Symbole einschließt.

- 5 6. Verfahren nach Anspruch 1, **dadurch gekennzeichnet, daß** der Schritt des dynamischen Skalierens folgende Schritte einschließt:

Kodieren von Kommunikationssignalen nach einer Kodierrate und

- 10 dynamisches Ändern der Kodierrate.

7. Verfahren nach Anspruch 1, **dadurch gekennzeichnet, daß** der Schritt des dynamischen Skalierens folgende Schritte einschließt:

- 15 Modulieren von Trägern nach einem ersten Modulationsschema und

dynamisches Ändern des ersten Modulationsschemas in ein zweites Modulationsschema.

8. Verfahren nach Anspruch 1, weiterhin **gekennzeichnet durch** folgende Schritte:

- 20 Übertragen von OFDM-Symbolen mit einer Aufwärtsstrecken-Datenrate; und

Empfangen von Kommunikationssignalen mit einer Abwärtsstrecken-Datenrate.

- 25 9. Verfahren nach Anspruch 8, weiterhin **gekennzeichnet durch** die Schritte des dynamischen Änderns der Abwärtsstrecken-Datenrate.

10. Verfahren nach Anspruch 9, **dadurch gekennzeichnet, daß** der Schritt des dynamischen Änderns der Abwärtsstrecken-Datenrate den Schritt des dynamischen Änderns der Anzahl von Trägern für die Kommunikationssignale einschließt.

- 30

11. Verfahren zum Empfangen von orthogonal frequenzgemultiplexten Symbolen entsprechend Betriebsparametern, die Symboldauer, Schutzintervall, Anzahl gemultiplexer Träger und Anzahl von Bit pro Symbol pro Träger einschließen, **gekennzeichnet durch** folgende Schritte:

- 35 Empfangen eines orthogonal frequenzgemultiplexten Signals, das orthogonal frequenzgemultiplexte Symbole enthält;

- 40 Erzeugen eines Rückkopplungssignals auf Grundlage des orthogonal frequenzgemultiplexten Signals und Bereitstellen des Rückkopplungssignals für dynamische Steuerungsschaltungen, die bestimmen, ob eine Betriebseigenschaft von orthogonal frequenzgemultiplexten Symbolen auf Grundlage des Rückkopplungssignals geändert werden sollte, wobei die Betriebseigenschaft mindestens eine aus Übertragungsrate, Signal/Rauschabstand und Laufzeitverbreiterungstoleranz ist; und

- 45 dynamisches Ändern von zumindest einem der Betriebsparameter für das Verfahren des Empfangens und **dadurch** Ermöglichen, daß das Verfahren entsprechend dynamisch skaliert Betriebseigenschaften bereitgestellte orthogonal frequenzgemultiplexte Symbole empfängt.

12. System des orthogonalen Frequenzmultiplexens zur Bereitstellung von Kommunikationssignalen entsprechend Betriebsparametern, die Symboldauer, Schutzintervall, Anzahl von orthogonal frequenzgemultiplexten Trägern und Anzahl von Bit pro Symbol pro orthogonal frequenzgemultiplexer Träger enthalten, **gekennzeichnet durch** dynamische Steuerschaltungen (15), die ein Rückkopplungssignal von einem Empfänger (31) empfangen, bestimmen, ob eine Betriebseigenschaft auf Grundlage des Rückkopplungssignals von einer ersten Stufe auf eine zweite Stufe skaliert werden sollte, wobei die Betriebseigenschaft mindestens eine aus Übertragungsrate, Signal/Rauschabstand und Laufzeitstreuungstoleranz ist, und nach der Bestimmung, daß die Betriebseigenschaft zur Bereitstellung von Kommunikationssignalen auf Grundlage des Rückkopplungssignals von der ersten Stufe auf die zweite Stufe skaliert werden sollte, Steuersignale für die Signalschaltungen (13, 16, 17) bereitstellen, um zumindest einen der Betriebsparameter dynamisch zu skalieren, um die Betriebseigenschaft der zweiten Stufe zu

- 50

- 55

EP 0 869 647 B1

erzielen, wobei die Steuerschaltungen (15) eine skalierbare Betriebseigenschaft **durch** adaptive Auswahl einer aus einer Mehrzahl von Betriebsparameter-Skaliermöglichkeiten steuert.

5 Revendications

1. Procédé de fourniture de signaux de communication en fonction de paramètres de fonctionnement à l'aide d'un multiplexage par répartition orthogonale en fréquence, lesdits paramètres de fonctionnement comportant la durée des symboles, l'intervalle de temps de garde, le nombre de porteuses multiplexées et le nombre de bits par symbole par porteuse, ledit procédé étant **caractérisé par** les étapes de :

réception d'un signal de rétroaction depuis un récepteur (31) ;
détermination du fait qu'une caractéristique de fonctionnement devrait être réglée pour passer d'un premier niveau à un deuxième niveau sur la base dudit signal de rétroaction reçu depuis ledit récepteur (31), ladite caractéristique de fonctionnement étant au moins une caractéristique parmi la vitesse de transmission, le rapport signal/bruit et la tolérance d'étalement du retard ; et
réglage dynamique d'au moins un desdits paramètres de fonctionnement pour obtenir une caractéristique de fonctionnement dudit deuxième niveau par sélection adaptative d'une parmi une pluralité d'options de réglage de paramètre de fonctionnement conformément à ladite étape de détermination.

2. Procédé selon la revendication 1, **caractérisé en outre par** les étapes de :

fourniture desdits signaux de communication à un certain débit de données ; et
modification dynamique dudit débit de données.

3. Procédé selon la revendication 1, comportant en outre l'étape de fourniture de symboles OFDM à partir desdits signaux de communication, et **caractérisé en ce que** ladite étape de réglage dynamique comporte l'étape de :

modification dynamique de la durée des symboles pour lesdits symboles OFDM.

4. Procédé selon la revendication 3, **caractérisé en ce que** ladite étape de modification dynamique comporte les étapes de :

transformation desdits signaux de communication en un symbole OFDM à l'aide d'une transformation de Fourier ; et
altération d'une base de temps pour ladite transformation de Fourier.

5. Procédé selon la revendication 1, comportant en outre l'étape de fourniture de signaux OFDM à partir desdits signaux de communication, et **caractérisé en ce que** ladite étape de réglage dynamique comporte l'étape de :

modification dynamique du nombre de porteuses pour lesdits symboles OFDM.

6. Procédé selon la revendication 1, **caractérisé en ce que** ladite étape de réglage dynamique comporte les étapes de :

codage de signaux de communication en fonction d'un taux de codage ; et
modification dynamique dudit débit de codage.

7. Procédé selon la revendication 1, **caractérisé en ce que** ladite étape de réglage dynamique comporte les étapes de :

modulation de porteuses en fonction d'un premier schéma de modulation ; et
modification dynamique dudit premier schéma de modulation en un deuxième schéma de modulation.

8. Procédé selon la revendication 1, **caractérisé en outre par** les étapes de :

transmission de symboles OFDM à un certain débit de données sur la liaison ascendante ; et
réception de signaux de communications à un certain débit de données sur la liaison descendante.

9. Procédé selon la revendication 8, **caractérisé en outre par l'étape de :**

modification dynamique dudit débit de données sur la liaison descendante.

5 10. Procédé selon la revendication 9, **caractérisé en ce que** ladite étape de modification dynamique dudit débit de données sur la liaison descendante comporte l'étape de :

modification dynamique du nombre de porteuses pour lesdits signaux de communication.

10 11. Procédé de réception de symboles multiplexés par répartition orthogonale en fréquence en fonction de paramètres de fonctionnement, lesdits paramètres de fonctionnement comportant la durée des symboles, l'intervalle de temps de garde, le nombre de porteuses multiplexées et le nombre de bits par symbole par porteuse, ledit procédé étant **caractérisé par les étapes de :**

15 réception d'un signal multiplexé par répartition orthogonal en fréquence comportant des symboles multiplexés par répartition orthogonale en fréquence ;
génération d'un signal de rétroaction sur la base dudit signal multiplexé par répartition orthogonale en fréquence et fourniture dudit signal de rétroaction à une circuiterie de commande dynamique qui détermine si
20 une caractéristique de fonctionnement de symboles multiplexés par répartition orthogonale en fréquence doit être modifiée sur la base dudit signal de rétroaction, ladite caractéristique de fonctionnement étant au moins une caractéristique parmi la vitesse de transmission, le rapport signal/bruit et la tolérance d'étalement du retard ; et
modification dynamique d'au moins un desdits paramètres de fonctionnement pour ledit procédé de réception, pour permettre ainsi audit procédé de recevoir des symboles multiplexés par répartition orthogonale en fréquence fournis conformément à des caractéristiques de fonctionnement ayant fait l'objet d'un réglage dynamique.
25

12. Système de multiplexage par répartition orthogonale en fréquence pour fournir des signaux de communication en fonction de paramètres de fonctionnement, lesdits paramètres de fonctionnement comportant la durée des symboles, l'intervalle de temps de garde, le nombre de porteuses multiplexées par répartition orthogonale en fréquence et le nombre de bits par symbole par porteuse multiplexée par répartition orthogonale en fréquence, ledit système étant **caractérisé par :**
30

35 une circuiterie de commande dynamique (15) qui reçoit un signal de rétroaction depuis un récepteur (31), détermine si une caractéristique de fonctionnement doit être réglée pour passer d'un premier niveau à un deuxième niveau sur la base dudit signal de rétroaction, ladite caractéristique de fonctionnement étant au moins une caractéristique parmi la vitesse de transmission, le rapport signal/bruit et la tolérance d'étalement du retard, et, après avoir déterminé que ladite caractéristique de fonctionnement permettant de fournir des
40 signaux de communication doit être réglée pour passer dudit premier niveau audit deuxième niveau sur la base dudit signal de rétroaction, fournit des signaux de commande à une circuiterie de signal (13, 16, 17) pour effectuer un réglage dynamique d'au moins un desdits paramètres de fonctionnement pour obtenir une caractéristique de fonctionnement dudit deuxième niveau, ladite circuiterie de commande (15) commandant une caractéristique de fonctionnement réglable par sélection adaptative d'une parmi une pluralité d'options de réglage de paramètre de fonctionnement.
45

50

55

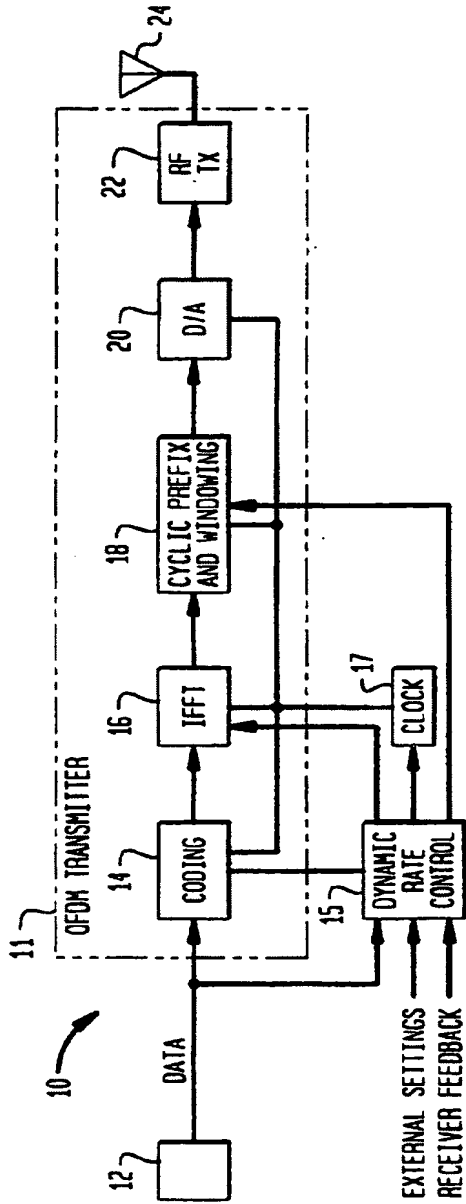


FIG. 1

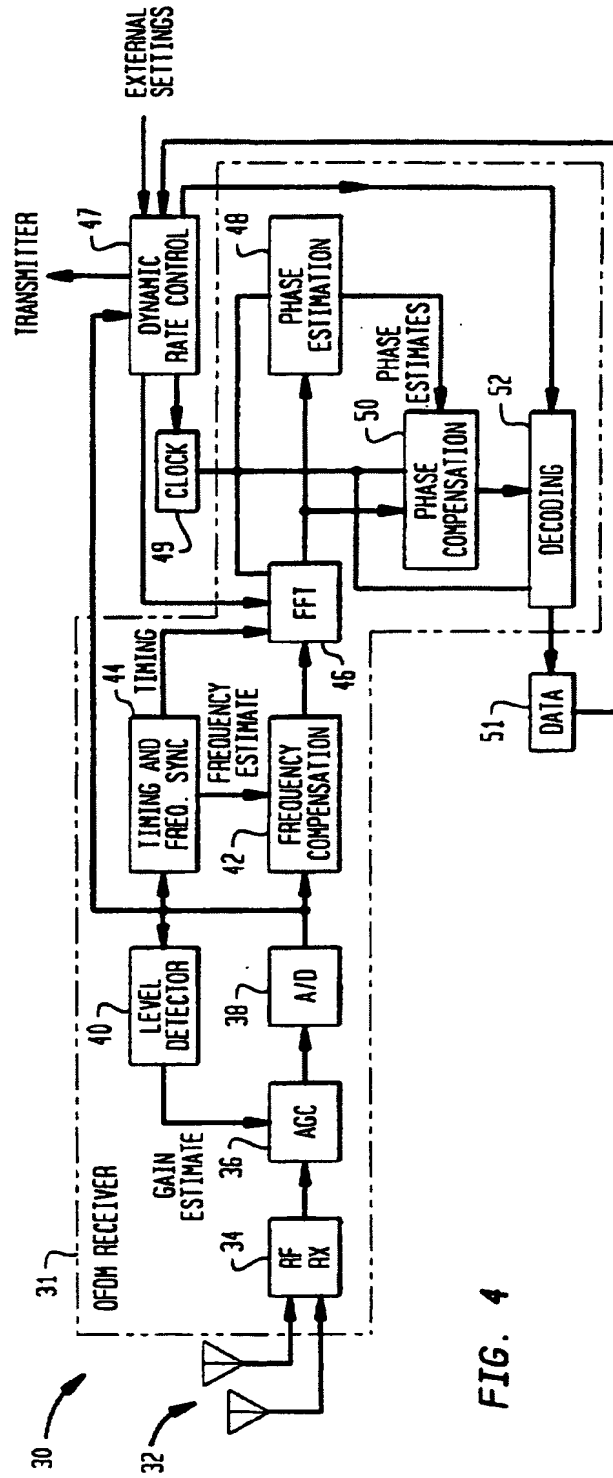


FIG. 4

FIG. 2

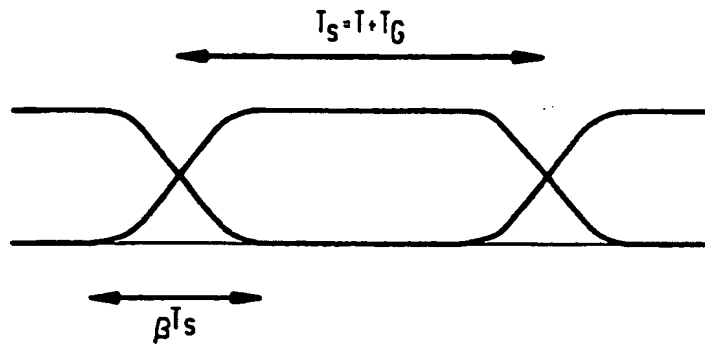


FIG. 3

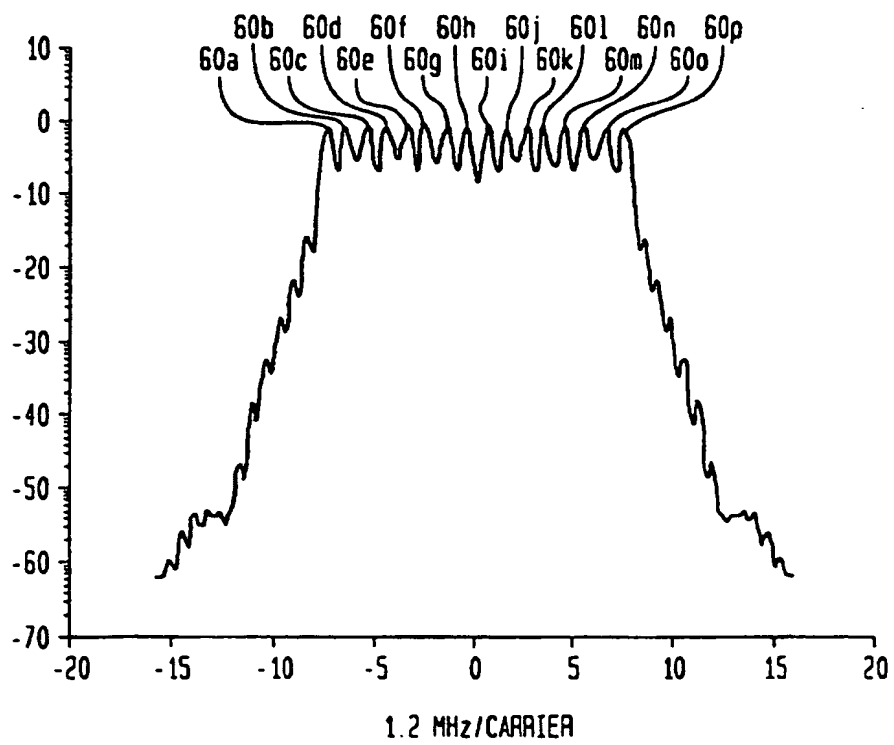


FIG. 5

